

TY-375HC



GARDNER DENVER
WATER JETTING
SYSTEMS, INC.

Pressures to 20,000 PSI
Flows to 44 GPM ♦ Power to 300 HP

Fast & Affordable Convertibility

Features:

- ♦ Pressure/flow convertibility from well of pump. Does not require unbolting and retorquing.
- ♦ No valve change required.
- ♦ Inline fluid end design.
- ♦ Pressures to 20,000 PSI.
- ♦ Flow rates from 9.3 GPM to 43.0 GPM.
- ♦ Maximum frame load of 19,500 Lbs. / 8845 Kg. for single speed.
- ♦ Field proven design.
- ♦ Extremely reliable.
- ♦ Easy field maintenance.
- ♦ High volumetric efficiency for maximum horsepower utilization.
- ♦ Rigorously subjected to full load testing.
- ♦ Manufactured on state-of-the-art machinery.



Applications:

- ♦ Water Blasting
- ♦ Hydrostatic Testing
- ♦ Chemical Injection
- ♦ Surface Preparation

Performance Specifications:

TY-375HC	PLUNGER DIA.	MAX. PRESSURE		FLOW					
		PSI	Bar	200 RPM		400 RPM		500 RPM	
				GPM	LPM	GPM	LPM	GPM	LPM
1.102" - 28mm	20K	1379	9.3	35.2	18.6	70.4	23.2	87.8	
1.250" - 32mm	15K	1034	11.9	45.0	23.9	87.0	29.9	113.2	
1.500" - 38mm	10K	689	17.2	65.1	34.4	130.2	43.0	162.8	

Note: All flows are based on 100% volumetric efficiency.
 All flows realized will vary dependent upon several factors, such as but not limited to:
 pump speed, pump pressure, plunger size and pumped fluid.
 "Typical" actual flow rates will be approximately 95% of values shown above.

Stroke: 3.75" / 95 mm • Max. Speed: 515 RPM • Weight: 1,950 lbs. / 885 Kg

GARDNER DENVER WATER JETTING SYSTEMS, INC.

Partek • Liqua-Blaster • CRS Power Flow • Jetting Systems • American Water Blaster


1-800-231-3628 ♦ 281-448-5800 ♦ Fax: 281-448-7500

www.waterjetting.com ♦ E-mail: mktg.wjs@gardnerdenver.com



GARDNER DENVER

TY-375HC

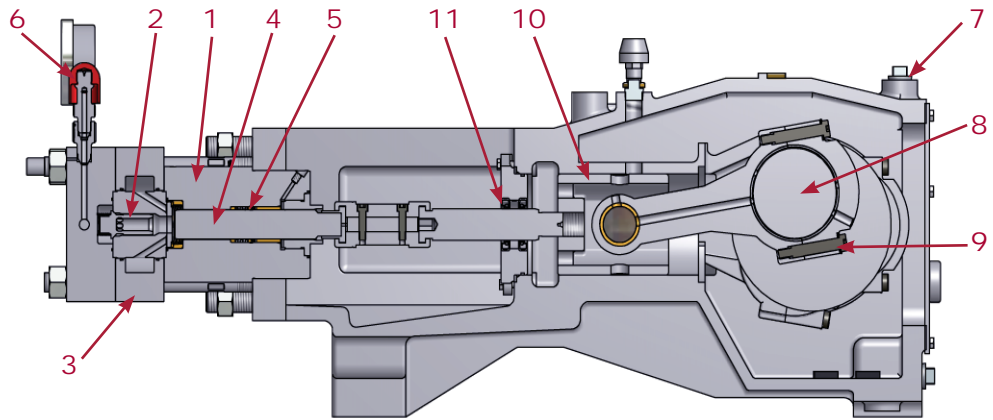

Fluid End


1. Fluid Cylinder Body: Three cylinders machined from hardened stainless steel and autofrettaged for extended life.
2. Valves: Heat-treated stainless steel, spring-loaded for positive closing. Both are machined, heat-treated and ground.
3. Suction Manifold: Anodized aluminum. Also available in stainless for salt water applications.
4. Plungers: Tungsten carbide or colmonoy coated stainless steel.
5. Plunger Packing: Multiple element chevron style, spring-loaded and self-adjusting. Easily replaceable from the rear of the stuffing box. Force-fed water provides lubrication and cooling.
6. Pressure Relief: Pressure safety head assembly (two rupture discs), integrally mounted in the fluid cylinder, or a combination of rupture disc and relief valve.

Power End

7. Power Frame: Manufactured from a single piece casting of high strength gray cast iron.
8. Crankshaft: Double extended alloy steel with tapered roller bearings to minimize side thrust load.
9. Connecting Rods: Ductile iron with automotive type split insert bearings.
10. Crossheads: Large, piston type constructed of gray iron.
11. Diaphragm Seals: Installed with o-rings and neoprene oil seals.

Bearings and crossheads are oil lubricated with a combined splash gravity system that insures adequate circulation at speeds as low as 200 RPM.

Dimensions:

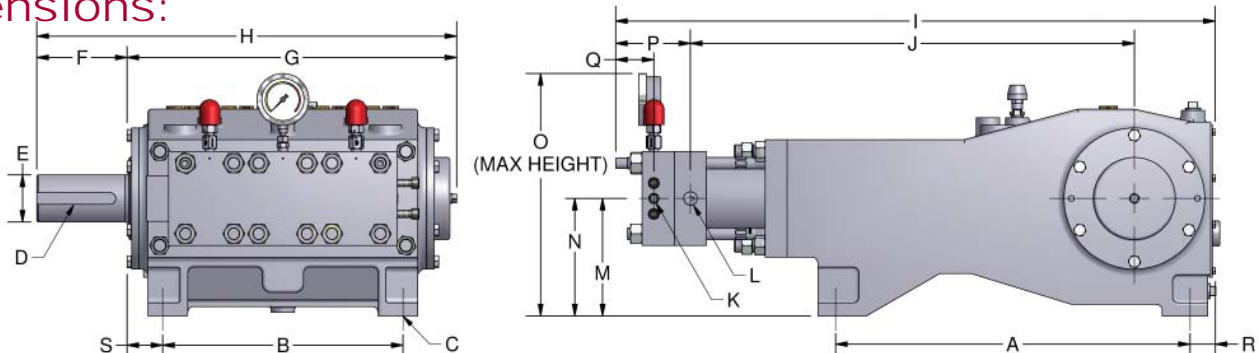

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
In.	30 ¹ / ₄	20 ¹ / ₂	1 ¹ / ₁₆	1	4	7 ¹¹ / ₁₆	28 ¹ / ₈	35 ¹³ / ₁₆	51 ¹ / ₈	37 ⁷ / ₈	1" MP	2" NPT	10	10	20 ⁵ / ₈	6 ³ / ₈	3 ¹ / ₄
mm	769	521	27	26	102	196	715	910	1299	962			254	254	524	162	83

GARDNER DENVER WATER
JETTING SYSTEMS, INC.
12300 North Houston Rosslyn Road
Houston, TX 77086

Your local distributor/representative is:



GARDNER DENVER WATER JETTING SYSTEMS, INC.

Partek • Liqua-Blaster • CRS Power Flow • Jetting Systems • American Water Blaster

1-800-231-3628 ♦ 281-448-5800 ♦ Fax: 281-448-7500

GARDNER DENVER www.waterjetting.com ♦ E-mail: mktg.wjs@gardnerdenver.com