

# QF-450HC




**GARDNER DENVER**  
WATER JETTING  
SYSTEMS, INC.

Pressures to 20,000 PSI  
Flows to 88 GPM ♦ Power to 600 HP

## Affordable Convertibility

### Features:

- ♦ Quintuplex (five plungers).
- ♦ Inline fluid end design.
- ♦ Pressure range to 20,000 PSI.
- ♦ Flow rates to 88 GPM.
- ♦ Maximum frame load of 25,000 Lbs. / 11340 Kg. for multi-speed and 20,750 Lbs. / 9412 Kg. for single speed.
- ♦ Field proven design.
- ♦ Extremely reliable.
- ♦ Easy field maintenance.
- ♦ Stainless steel fluid end construction.
- ♦ High volumetric efficiency for maximum horsepower utilization.
- ♦ Manufactured on state-of-the-art machinery.
- ♦ Rigorously subjected to full load testing.

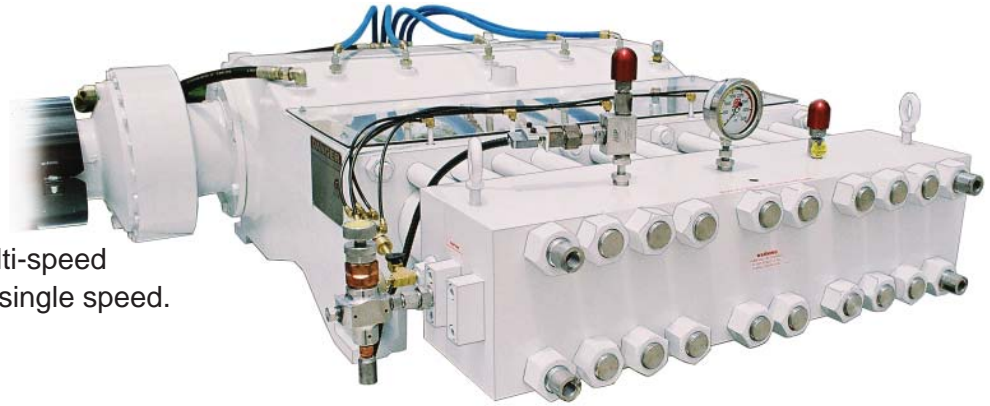

### Applications:

- ♦ Water Blasting
- ♦ Hydrostatic Testing
- ♦ Water Disposal
- ♦ Concrete Demolition
- ♦ Surface Preparation

### Performance Specifications:

	PLUNGER DIA.	MAX. PRESSURE		FLOW					
		PSI	Bar	200 RPM		400 RPM		500 RPM	
				GPM	LPM	GPM	LPM	GPM	LPM
QF-450HC	1.0625" - 27mm	20K	1379	17	64.3	34	128.7	43	162.8
	1.250" - 32mm	15.5K	1069	24	90.8	48	181.7	60	227.1
	1.375" - 35mm	13K	896	29	109.8	57	215.7	72	272.0
	1.500" - 38mm	11K	758	35	132.5	69	261.1	86	325.5

Note: Pump is available with reduction gear upon request.

Note: All flows are based on 100% volumetric efficiency. Pressures shown are based on single-speed performance. See unit specification sheets for pressure ratings on multi-speed units.

**Stroke: 4.5" / 114 mm • Max. Speed: 515 RPM • Weight: 5,600 lbs. / 2530 Kg**

**GARDNER DENVER WATER JETTING SYSTEMS, INC.**

Partek • Liqua-Blaster • CRS Power Flow • Jetting Systems • American Water Blaster


**1-800-231-3628 ♦ 281-448-5800 ♦ Fax: 281-448-7500**

**www.waterjetting.com ♦ E-mail: mktg.wjs@gardnerdenver.com**



**GARDNER DENVER**

# QF-450HC

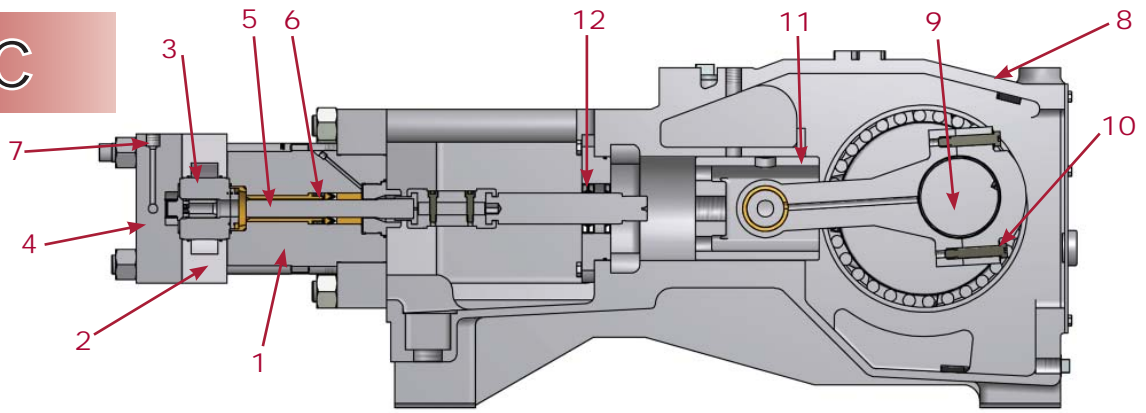

## Fluid End


1. Stuffing Boxes: Five boxes machined from hardened stainless steel, autofrettaged for extended life.
2. Suction Manifold: Hard, anodized aluminum. Also available in stainless for salt water applications.
3. Valve Assembly: Hardened stainless steel, autofrettaged for extended life. Valves are spring-loaded for positive closing with a common seat used for both suction and discharge valves.
4. Discharge Manifold: Manufactured from precipitation hardened stainless steel.
5. Plungers: Made of solid tungsten carbide or stainless steel with colmonoy coating.
6. Plunger Packing: Carbon filled Teflon™ and polyethylene base, spring-loaded, self-adjusting and easily replaceable from the rear of the stuffing box. Force-fed water provides lubrication and cooling.
7. Pressure Relief: Pressure safety head assembly (two rupture discs), mounted to the discharge manifold.

## Power End

8. Power Frame: Manufactured from a single piece casting of high strength gray cast iron.
9. Crankshaft: Single extended alloy steel four sets of main roller bearings. Crankshaft is drilled for forced oil lubrication. Bearings and crossheads are oil lubricated via a forced-oil lubrication system with filter.
10. Connecting Rods: Ductile iron with automotive type split insert bearings.
11. Crossheads: Large, piston type constructed of gray iron.
12. Diaphragm Seals: Installed with o-rings or gaskets and neoprene oil seals.
13. Pressurized Oil Lubrication System.

Reduction Gear: Constructed of top quality AGMA class 12 steel. Hardened and ground bull and pinion gears for strength and durability. Ratios available - 3.50:1, 4.200:1, 4.636:1, 5.210:1.

## Dimensions:

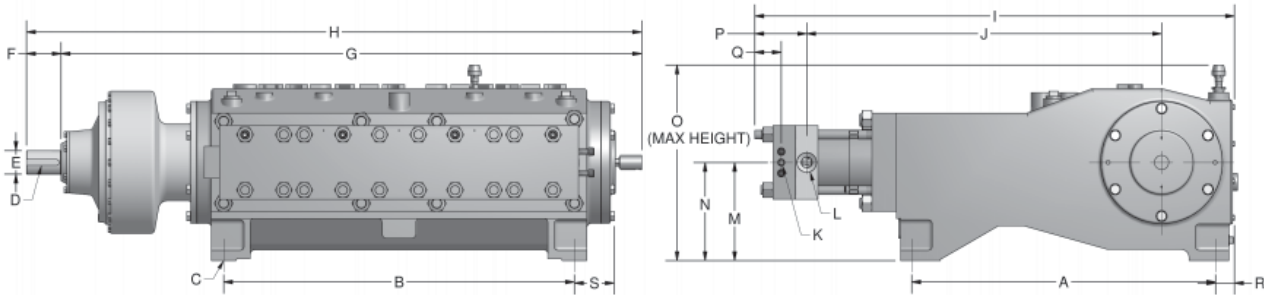

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S
In.	37 <sup>1</sup> / <sub>4</sub>	43	1 <sup>5</sup> / <sub>16</sub>	3 <sup>3</sup> / <sub>4</sub>	2 <sup>7</sup> / <sub>8</sub>	4 <sup>1</sup> / <sub>4</sub>	71 <sup>1</sup> / <sub>8</sub>	75 <sup>13</sup> / <sub>16</sub>	58 <sup>13</sup> / <sub>16</sub>	43 <sup>1</sup> / <sub>2</sub>	1" MP	2" NPT	12	12	23 <sup>7</sup> / <sub>8</sub>	6 <sup>3</sup> / <sub>8</sub>	3 <sup>1</sup> / <sub>4</sub>	2 <sup>5</sup> / <sub>16</sub>	4 <sup>7</sup> / <sub>8</sub>
mm	947	1093	34	19	73	108	1807	1915	1494	1105			305	305	607	162	83	59	124

GARDNER DENVER WATER  
JETTING SYSTEMS, INC.  
12300 North Houston Rosslyn Road  
Houston, TX 77086

Your local distributor/representative is:



GARDNER DENVER WATER JETTING SYSTEMS, INC.

Partek • Liqua-Blaster • CRS Power Flow • Jetting Systems • American Water Blaster

1-800-231-3628 ♦ 281-448-5800 ♦ Fax: 281-448-7500

www.waterjetting.com ♦ E-mail: mktg.wjs@gardnerdenver.com