



ROTATION SPEED AIR PRESSURE AND CONSUMPTION	
19 RPM	1 bar 155 L/min
28 RPM	2 bar 230 L/min
33 RPM	3 bar 275 L/min
37 RPM	4 bar 320 L/min
40 RPM	5 bar 360 L/min
51 RPM	6 bar 395 L/min

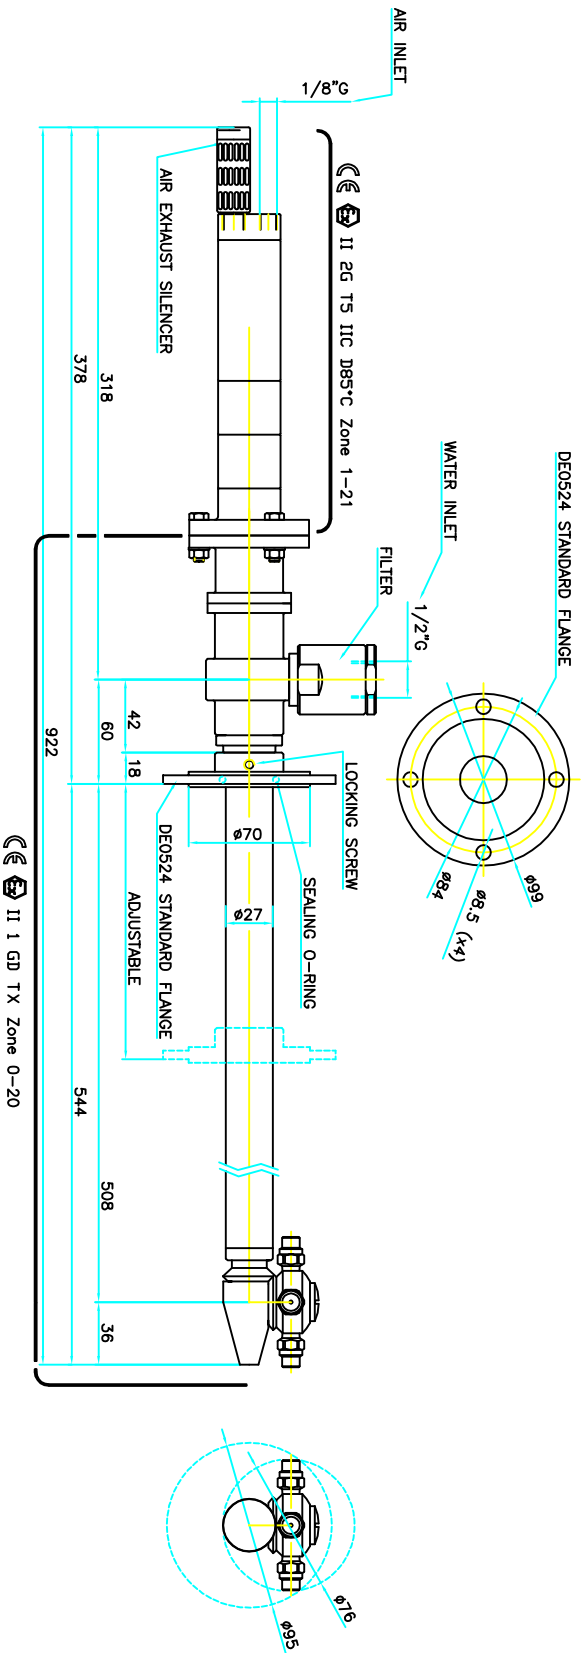

TECHNICAL DATA

O-RING	NBR - EPDM - VITON
SUPPER	PTFE+CARBON FIBRE
BUSHING	AIISI 316
FILTER	700 MICRON
NOZZLES POSITIONS	2 - 4
NOZZLES THREAD	1/8"NPT
TESTING NOZZLES	0 x 0000
OPERATING FLOW RANGE	0 - 60 L/min
TESTING FLOW	00 L/min
OPERATING PRESSURE RANGE	0 - 200 bar
TESTING PRESSURE	000 bar
CENTER LINE MIN PASS THROUGH HOLE	95 mm
MANUAL MIN PASS THROUGH HOLE	76 mm
PIPE LENGTH	508 mm
MAX OPERATING TEMPERATURE	90 °C
MATERIAL	INOX AIISI 316
CONICAL GEARS	FIXED Z=29 ROTATING Z=31
MODULE	1
FULL CYCLE	31 ROTATIONS
FULL CYCLE TIME	1 min AT 3 BAR AIR PRESSURE
AIR MOTOR	BA0723 ATLAS COPCO
AIR EXHAUST	WITH SILENCER
ROTATION SPEED	SEE CHART
WEIGHT	7.5 KG

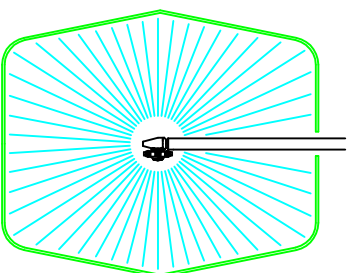

RUGOSITA' (UNI 4600)	MODIFICA	1	2	3	4	5
GREZZO	FOGLIO	XXXX				
DATA	XX-XX-XX					
TOLLERANZE GENERALI classe m UNI-EN 22768/1	NOTE:					
±0.1		±0.2	±0.3	±0.5	±0.8	±1.2
±0.6		30±120	400±400	1000±1000	2000±2000	
SGROSS. 3/2	DESCRIZIONE:	XC 061-PPF G100040 APPLICATION DRAWING				
FINITURA 1.6/	RETTIFICA					
RETTIFICA 0.8/	DESCRIZIONE:	XC 061-PPF APPLICATION DRAWING				
SCALE	1.3	A3	O			
DISIGN.: CR	CONTR.: DM					
DATA: 06.10.08	MOD.					
CODICE:	XC 061-PPF					