


- 2 1/8"NPT NOZZLES POSITIONS ON 20° CONE
- 2 1/8"NPT NOZZLES POSITIONS ON 40° CONE
- 2 1/8"NPT NOZZLES POSITIONS ON 60° CONE
- 2 1/8"NPT NOZZLES POSITIONS ON 80° CONE
- 2 1/8"NPT NOZZLES POSITIONS ON 100° CONE
- 2 1/8"NPT NOZZLES POSITIONS ON 120° CONE



PLUG NOZZLES POSITIONS NOT USED

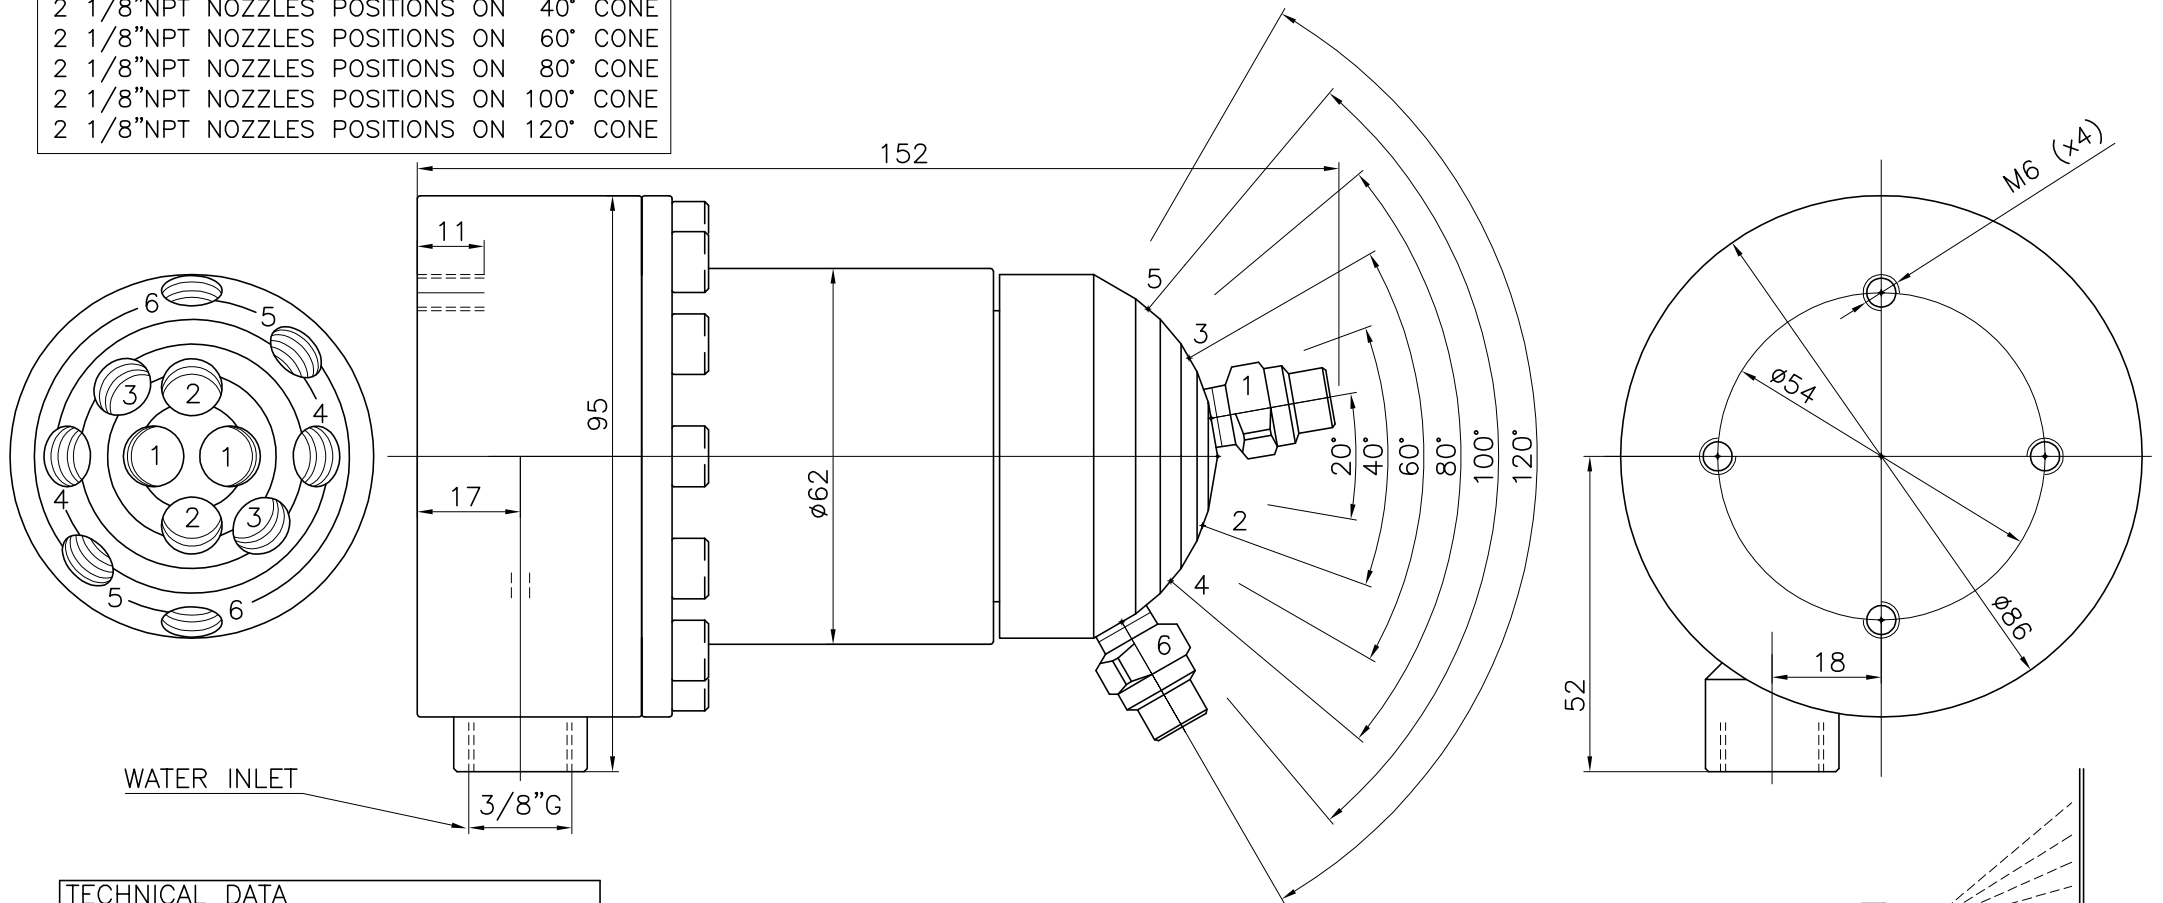

WATER INLET

TECHNICAL DATA	
temperature max	90°C
pressure max	150 bar
flow	15-30 l/min
spinning speed	180-200 rpm
water inlet	3/8"G
nozzle thread	1/8"NPT
nozzles positions	2 (x6 angles)
weight	3.0 Kg

	flow L/min				
	15	18	20	25	30
turbine nozzle	3,0 mm	4,0 mm	4,0 mm	5,0 mm	6,0 mm
washing nozzles	2x0003	2x0004	2x0004	2x00055	2x00065
pressure bar	105	95	110	100	100
speed rpm	207	184	203	200	200
pressure drop bar	8,5	5	6,5	6	7,5

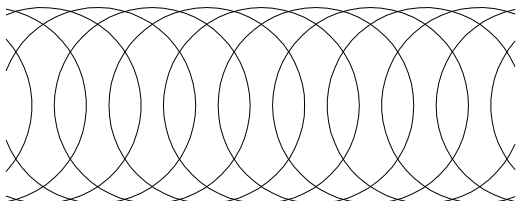

WITH LINEAR MOTION PATTERN

RUGOSITA' (UNI 4600)	MODIFICA	1	2	3	4	5	 CLEANING HEADS MONTECCHIO E. (RE) - ITALY
GREZZO	FOGLIO	XXXX					
SGROSS.	DATA	XX.XX.XX					
FINITURA	TOLLERANZE GENERALI classe m UNI-EN 22768/1						DISEGN.: CR CONTR.: DM DATA: 14.04.09 MOD. SCALA
RETTIFICA	NOTE: vers. 01						
	MATERIALE:						1:1 A4 1
	DESCRIZIONE: SURFACE WASHING SIDE INLET INSTALLATION DRAWING						CODICE: PW049-AAB